

Find below the process required for adjusting the headlight angle on the Cake Kalk/Osa.


Tools Required: 5mm key/bit, and a 10mm socket and driver.



Step 1: Pull back the headlight Rubber Headlight Hood.




Step 2: Using a 10mm socket, remove the securing lock nut for the headlight. A small note - The nut on the left side of the cover can be tricky to see, as it is underneath the rubber bumper (photo below of its location).

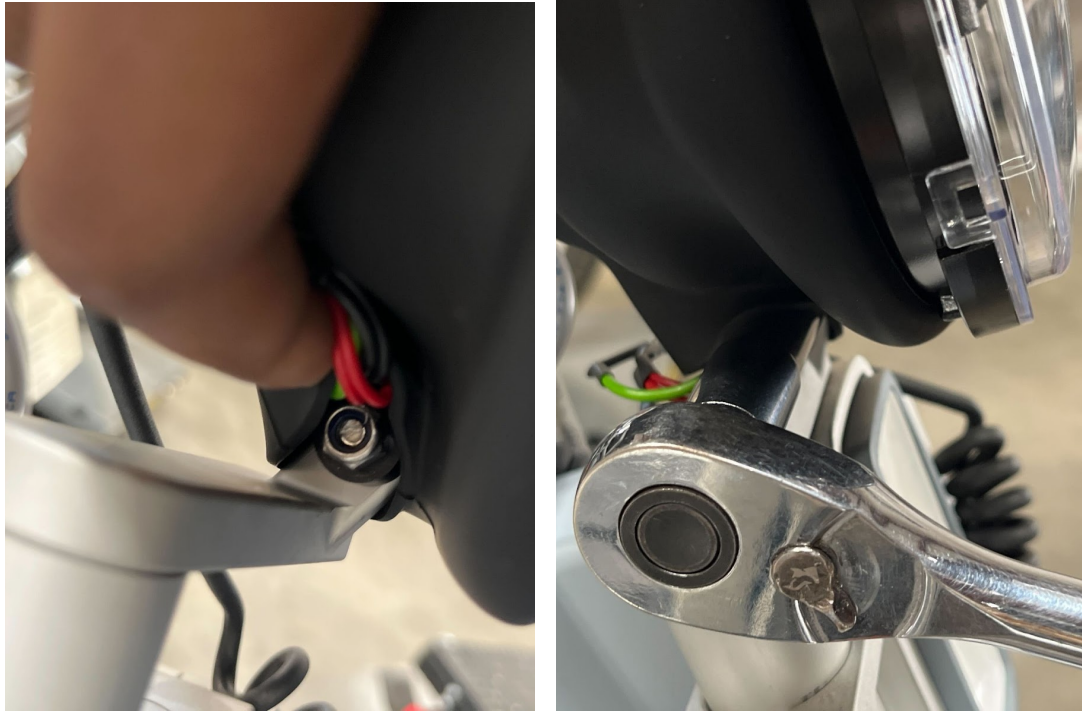

Step 2B: After you have the lock nut removed, use a 5mm key/bit to loosen the bolt and adjust your headlight to desired position. Once in position, tighten down the 5mm bolt as tight as possible



Step 3: From here, we will reinstall the locknut using a 10mm socket to tighten down the nut

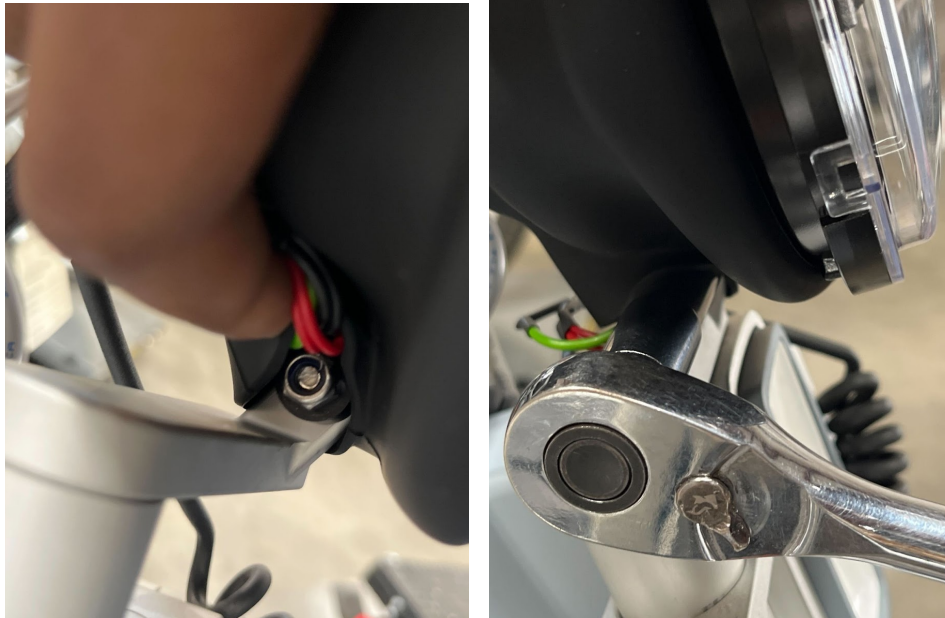

Check Headlight is at proper position



If at any point, before or during the process, you feel unsure about something, please do not hesitate to reach out!

Thank you!

Cake Service Team