


Kalk Street Legal – Adjusting the Sidestand

Tools Required:

Torx T40 key/bit

13mm Wrench

Step 1: Gently loosen the 13mm nut on the backside of the sidestand assembly.

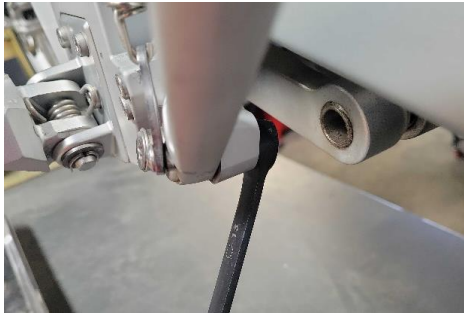

Step 2: Using a T40 key/bit, loosen the main bolt that the sidestand rotates on. Loosening the bolt just a $\frac{1}{4}$ turn may be all that is needed to allow the sidestand to move freely, and spring up into the resting position automatically.

If you loosen the bolt too much, the sidestand will have lateral play that we would like to avoid. If the bolt is too tight, the sidestand will have resistance when moving up and down. There is a “sweet spot” with no play, but still allows the sidestand to move freely.



Step 3: With the securing bolt in the correct position, hold it in place using the t40 bit/key and tighten the 13mm locknut on the backside of the assembly to “lock” its position.

Complete!